

SmartCube DualBar - SC-40 and GF-27

SmartCube DualBar is the world's most advanced minibar and GuestFridge GF-27 combo. It is a completely modular system using virtually silent thermoelectric cooling technology, and offering full automation alongside guests personal use GuestFridge. SmartCube DualBar is available as an insertable that can be integrated into any existing hotel furniture or room design. The simplicity of the S4 software makes it the most powerful and robust minibar management tool in the industry.



Standard Features

- Silent thermoelectric cooling technology
- Fully automated with intelligent infrared sensors
- Self-diagnostic S4 reporting software
- Comprehensive management reports
- Optional SmartTrays or single water sensors
- Solid and Glass door styles available (SC-40 Only)
- Easily adjustable shelves and transparent door racks
- ADA compliant, can open with one hand
- Extremely quiet virtually silent operation
- Removable product dividers for easy cleaning
- Thermal insulation manufactured using eco-friendly c-pentane
- Strong universal door hinge - convertible
- All-round magnetic seals to keep the door closed
- Internal automatic LED lighting
- Fully automatic defrost

Technical Specifications

	SmartCube DualBar
Part Number	SC-DualBar
Cooling Type	Thermoelectric Heat Pipe
Capacity (liters / cubic feet)	67 / 2.36
Dimensions HxWxD (inches) HxWxD (mm)	22.92 x 28.465 x 18.7* 582.4 x 723 x 475*
Door Option	Solid Foam Glass Door Glass Door (SC-40 Only)
Watts (W)	60W
Amps	0.5-0.9
Voltage (V)	110V / 60Hz 220V / 50Hz
Energy Consumption (kWh/24h)**	0.9 kWh/24h**
Net Weight (kgs)	73.63lbs / 33.4kgs
Noise Level (dB)	40 dB
Certification	CSA/CE/FCC/ETL/WEEE/RoHS ISO 9001 and ISO 14001 certified

* Measured To Door Handle


** Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

Specifications may change without notice due to continuous product development.

smartcube.minibarsystems.com



MINIBAR SYSTEMS

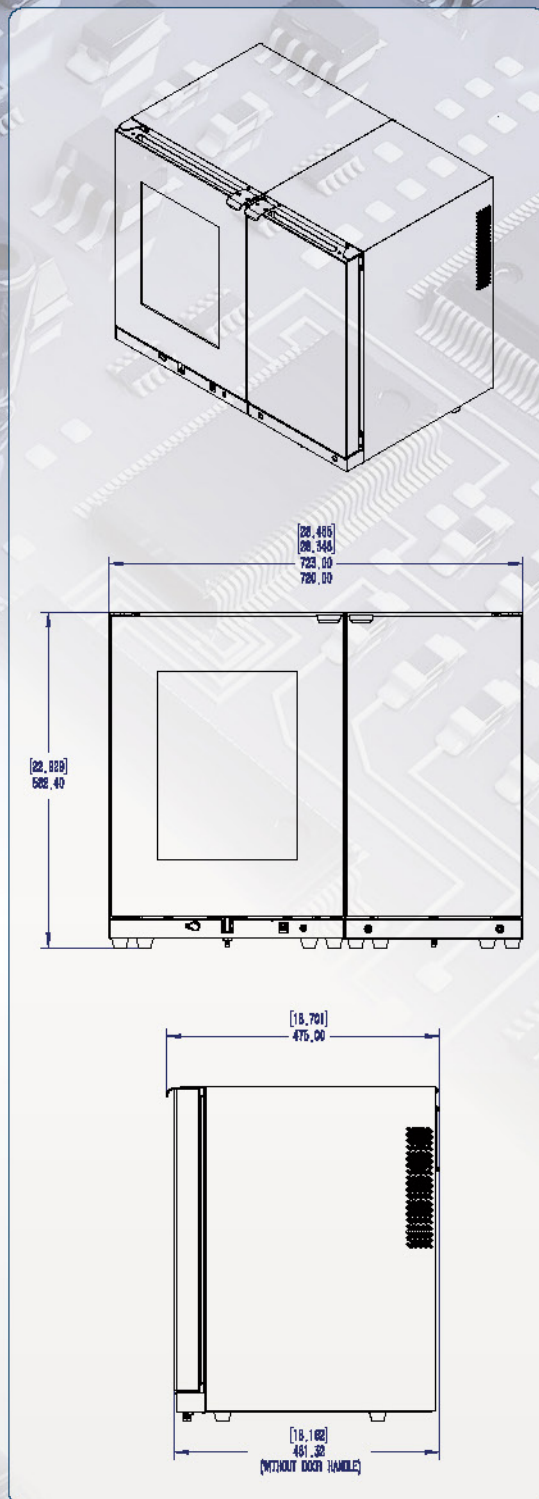

Ventilation

The inlet vent(s) must have a minimum open area of 80 in² to comply with specifications. A minimum exhaust ventilation area of 80 in² is required for proper exhaust ventilation.

