

### 1. Standard Features

- Environmentally sustainable energy efficient thermoelectric cooling system
- Console Box (control module) can be serviced easily and located remotely
- Shelves use infrared sensors (no moving or mechanical parts)
- Plug-and-play cold cube shelving and door racks (no cables)
- NEW robust electronic lock with mechanical override feature
- Removable product dividers for easy cleaning
- Cyclopentane thermal foaming insulation (reduces ozone depletion)
- Reversible door hinging
- Magnetically sealed doors
- Internal LED lighting
- Automatic defrost
- Self-diagnostic reporting software
- ADA compliant


### Full Glass Door Options



Customized silkscreening available including logo's

### 2. Technical Specifications

	SC-DulBar Thermoelectric
Part Number	SC-Dualbar
Cooling Type	Peltier Thermoelectric Superconductor S Heat Pipe
Capacity (liters / cubic feet)	67 / 2.36
Dimensions HxWxD (inches)*	22.92 x 28.465 x 18.7*
HxWxD (mm)*	582.4 x 723 x 475*
Door Option	Full Glass Front: No Window, Full Window
Watts (W)	60W & 42-52W
Voltage (V)	110V / 60Hz 220V / 50Hz
Amps	0.5 & 0.35-0.75
Energy Consumption (kWh/24h)**	0.43 kWh/24h & 0.4 kWh/24h**
Net Weight (lbs / kgs)	73.63lbs / 33.4 kgs
Noise Level (dB)	40 dB
Certification	CSA/CE/FCC/ETL/WEEE/RoHS ISO 9001 and ISO 14001 certified

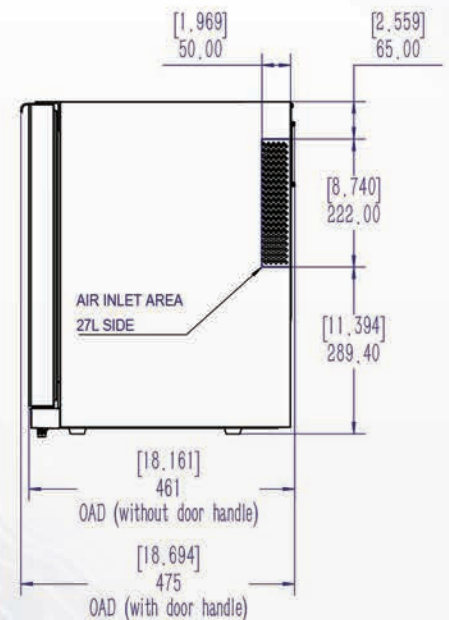

\* Measured to door handle

\*\*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371