


1. Standard Features

- Environmentally sustainable energy efficient thermoelectric cooling system
- Extremely quiet operation
- Removable shelving for easy cleaning
- Cyclopentane thermal foaming insulation (reduces ozone depletion)
- Adjustable thermostat
- Reversible door hinging
- Magnetically sealed doors
- Internal LED lighting
- Automatic defrost
- Customized front panel to integrate with design†
- Case good cabinet door sliders available
- ADA compliant

2. Technical Specifications

	GF27T Thermoelectric
Part Number	GF27T
Cooling Type	Peltier Thermoelectric Superconductor 5 Heat Pipe
Capacity (liters / cubic feet)	27 / 0.95
Dimensions HxWxD (inches) HxWxD (mm)	22.92 x 12.2 x 18.55* 582.4 x 310 x 471.1*
Door Option	Full Glass Front: No Window
Watts (W)	60W
Voltage (V)	110V / 60Hz or 220V / 50Hz
Amps	0.5-0.9
Energy Consumption (kWh/24h)**	0.43 kWh/24h & 0.4 kWh/24h**
Net Weight (lbs / kgs)	27.12lbs / 12.3 kgs
Noise Level (dB)	40 dB
Certification	CSA/CE/FCC/ETL/WEEE/RoHS ISO 9001 and ISO 14001 certified

Full Glass Door Options

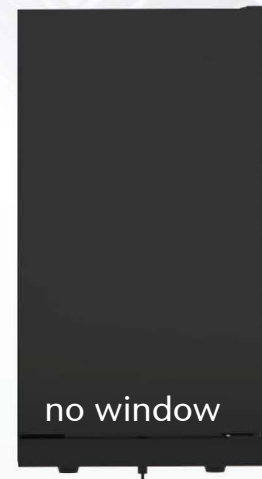

* Measured to door handle

**Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

† Recommended weight of panel is no more than 9 lbs. (4.08Kg). Recommended thickness, ¾ inches (18-20mm)

Specifications may change without notice due to continuous product development.