

Non-Automated
Minibars



THE
SMARTCUBE®
CLASSIC COLLECTION
(non-automated)



MINIBAR SYSTEMS
smart bars • smart people • smart solutions



Classic LP60T solid foam glass door

SmartCube Classic - Engineered to upgrade in the future

SmartCube Classic minibars have been quality engineered with generous internal space, simple and stylish design, low energy consumption and silent thermoelectric cooling technology. It's a great value for your hotel.



Classic LP40T glass door



Classic LP40T solid door



Classic DC40T Drawer minibar

Quality Engineered

- 30% more energy efficient over previous models
- Environmentally sustainable energy efficient cooling system
- Peltier Thermoelectric Superconductor 5 Heat Pipe technology
- State-of-the-art insulation properties (Argon, low-E glass)
- Solid foam insulated frame for glass door
- Magnetic seals to keep the door tightly closed
- Free of hazardous materials
- Cyclopentane foaming agent – most environmentally friendly material
- Automatic defrost

Upgradable Design

- Classic Honor Bar -> Door Open -> Fully Automated
- Maximum Flexibility
- Customized front panel to integrate with design†
- Case good cabinet door sliders available

Technical Specifications

| | Classic LP40T | Classic LP60T | Classic DC40T |
|---|--|---|---|
| Capacity (liters / cubic feet) | 40 / 1.41 | 50 / 1.766 | 40 / 1.41 |
| Dimensions HxWxD (inches) HxWxD (mm) | 22.92 x 16.14 x 18.7* 582.4 x 410 x 475* | 22.92 x 19.29 x 18.7* 582.4 x 490 x 475* | 17.4 x 21.65 x 18.55†† 442 x 550 x 471.3†† |
| Door Options | Full Glass Front: No Window, Full Window, Partial Window, Stainless Full Window Solid Laminated: Black Solid, Stainless Steel | | Full Glass Front: No Window Solid Laminated: Black Solid |
| Door Hinge | Reversible | Reversible | Drawer |
| Shelves Type | Tempered Glass | Tempered Glass | Metal |
| Watts (W) | 60W | 42-52W | 40W |
| Voltage (V) | 110V / 60Hz or 220V / 50Hz | 110V / 60Hz or 220V / 50Hz | 110V / 60Hz or 220V / 50Hz |
| Amps | 0.5-0.9 | 0.35-0.75 | 0.35-0.75 |
| Consumption (kWh/24h)** | 0.43 kWh/24h** | 0.32 kWh/24h** | 0.32 kWh/24h** |
| Net Weight (lbs / kgs) | 46.5 lbs / 21.1 kgs | 52.91 lbs / 24 kgs | 49.6 lbs / 22.5 kgs |
| Noise Level (dB) | 40 dB | 40 dB | 40 dB |
| Certification | CCC/CB/CETL/CE/GS/RoHS/UL/CSA/ISO 9001 2008/ISO 14001 2004 | | |

* Measured to door handle

**Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

† Recommended weight of panel is no more than 9 lbs. (4.08Kg). Recommended thickness, ¾ inches (18-20mm)


†† Depth with handle is 20.36 inches (517.3 mm). Handle adds 0.9 inches (46mm) to depth

Specifications may change without notice due to continuous product development.

Sophisticated Finish

- Translucent racking on door for high visibility of products
- Internal LED lighting
- High impact exterior finish
- Full Glass Face Door Options: no, partial or full window
- Solid Laminated Door Options: black solid, stainless steel
- Custom: stainless steel full window

Full Glass Door Options

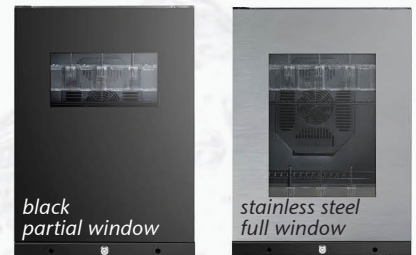

Solid Laminated Door Options

